

3-718-R006


### Manifolds

Distributors with 1x DN40 coupling groove part to 3 x DN20 coupling groove parts

#### For simultaneous gas handling on several gas compartments

The DILO manifolds help to significantly increase the efficiency of gas handling with service carts in the GIS unit production or at utility companies.

The standard DILO manifolds are equipped with three DN20 connections as well as a DN20 or DN40 connection to the service cart. Thus, it is possible to recover, to evacuate or to fill three gas compartments at the same time.

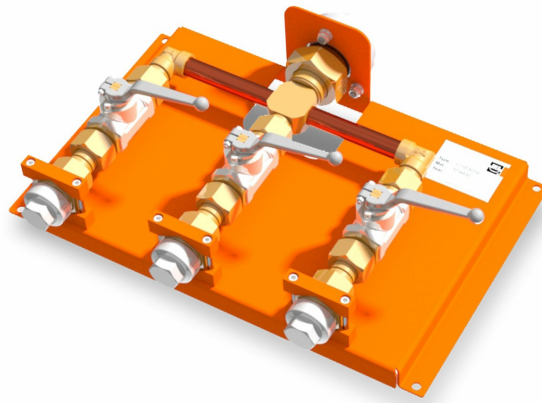

#### Advantages & functions

- gastight version
- self-closing couplings
- ball valves individually lockable
- suitable for wall assembly

#### Packaging

3-775-R013-C

Packing for 3-718-R002 / 3-718-R006